



**MORPHO**<sup>®</sup>  
P A I N T S

*COLOURS*  
OF EXCELLENCE

[www.morphopaints.com](http://www.morphopaints.com)

PRODUCT CATALOGUE

---

glasshaus

## ABOUT US

Morpho Coatings Pvt Ltd is a motivated company specializing in Water and Solvent based Paint. We believe passionately in providing excellent Quality products, which is why we commit ourselves to giving you the best.

If you're looking for something new, you're in the right place. We strive to be industrious and innovative, offering our customers something they want, putting their desires at the top of our priority list. Not only have we got the trendiest products, but we can also guarantee that they are of the finest quality.

We entered into the market aiming to provide our customers with products that keep them happy, and at prices that keep them happy. Our customers are our top priority and through our products we work hard towards building long-lasting and meaningful relations with them.

Leadership  
Innovation  
Dedication  
Durable Protection







## QUALITY POLICY

Morpho Coatings Pvt Ltd will show commitment to comply with the requirements and continually strive to improve the effectiveness of the Quality procedures implemented.

Morpho Coatings Pvt Ltd has a quality framework for establishing and reviewing quality objectives. We review the quality policy guidelines every year to make sure we do not miss out on the quality.

The quality guidelines, regulations are continuously Communicated and understood by the employees and others related to Morpho Coatings Pvt Ltd.

## OUR PHILOSOPHY

We are innovative, research and product developments are our work strategies. We believe in keeping our market research fundamentals clear, while maintaining the zeal of admiration intact, Morpho Coatings Pvt Ltd will always show contrasting ideas to our partners and customers.

The potential in pioneering new formulations and never ending efforts to provide customer satisfaction is the key factor that drives us.







# VILLA PROTEC

## WATER PROOF SCRUB RESISTANCE WEATHER PROOF EXTERIOR EMULSION


Morpho Paints Villa Protec is an Advanced Weatherproof Ultra Luxury Exterior Emulsion which is suitable to stand against all kinds of weather conditions. It offers excellent durability, has nanotechnology that promises to keep walls protected from dampness, cracks and color fading. Villa Protec comes with long-lasting formulation for the severest of climatic conditions and grants 10 year performance warranty.

METHODS OF APPLICATIONS	: Brush, Roller or Spray
DILUTION	: Water
DRYING TIME	: Surface dry 60-90 minutes/Hard dry - 24-48 hrs
RECOAT TIME	: At an interval of 4-6 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 190 - 240 square feet per liter single coat
SHADE	: White and Bases
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr 18ltr, 9ltr, 3.6ltr, 900ml

## FEATURES

- Soothing & Refreshing fragrance.
- Excellent hiding, especially in dark colors.
- Easy to apply with brush, roller or spray.
- Resistant to fading, cracking, peeling, blistering, etc.
- Excellent flow and leveling.
- Superior adhesion and excellent resistance to chalking.
- Provide a fungus Resistant Coating.
- Low Odour & Low VOC.
- Moisture resistant.



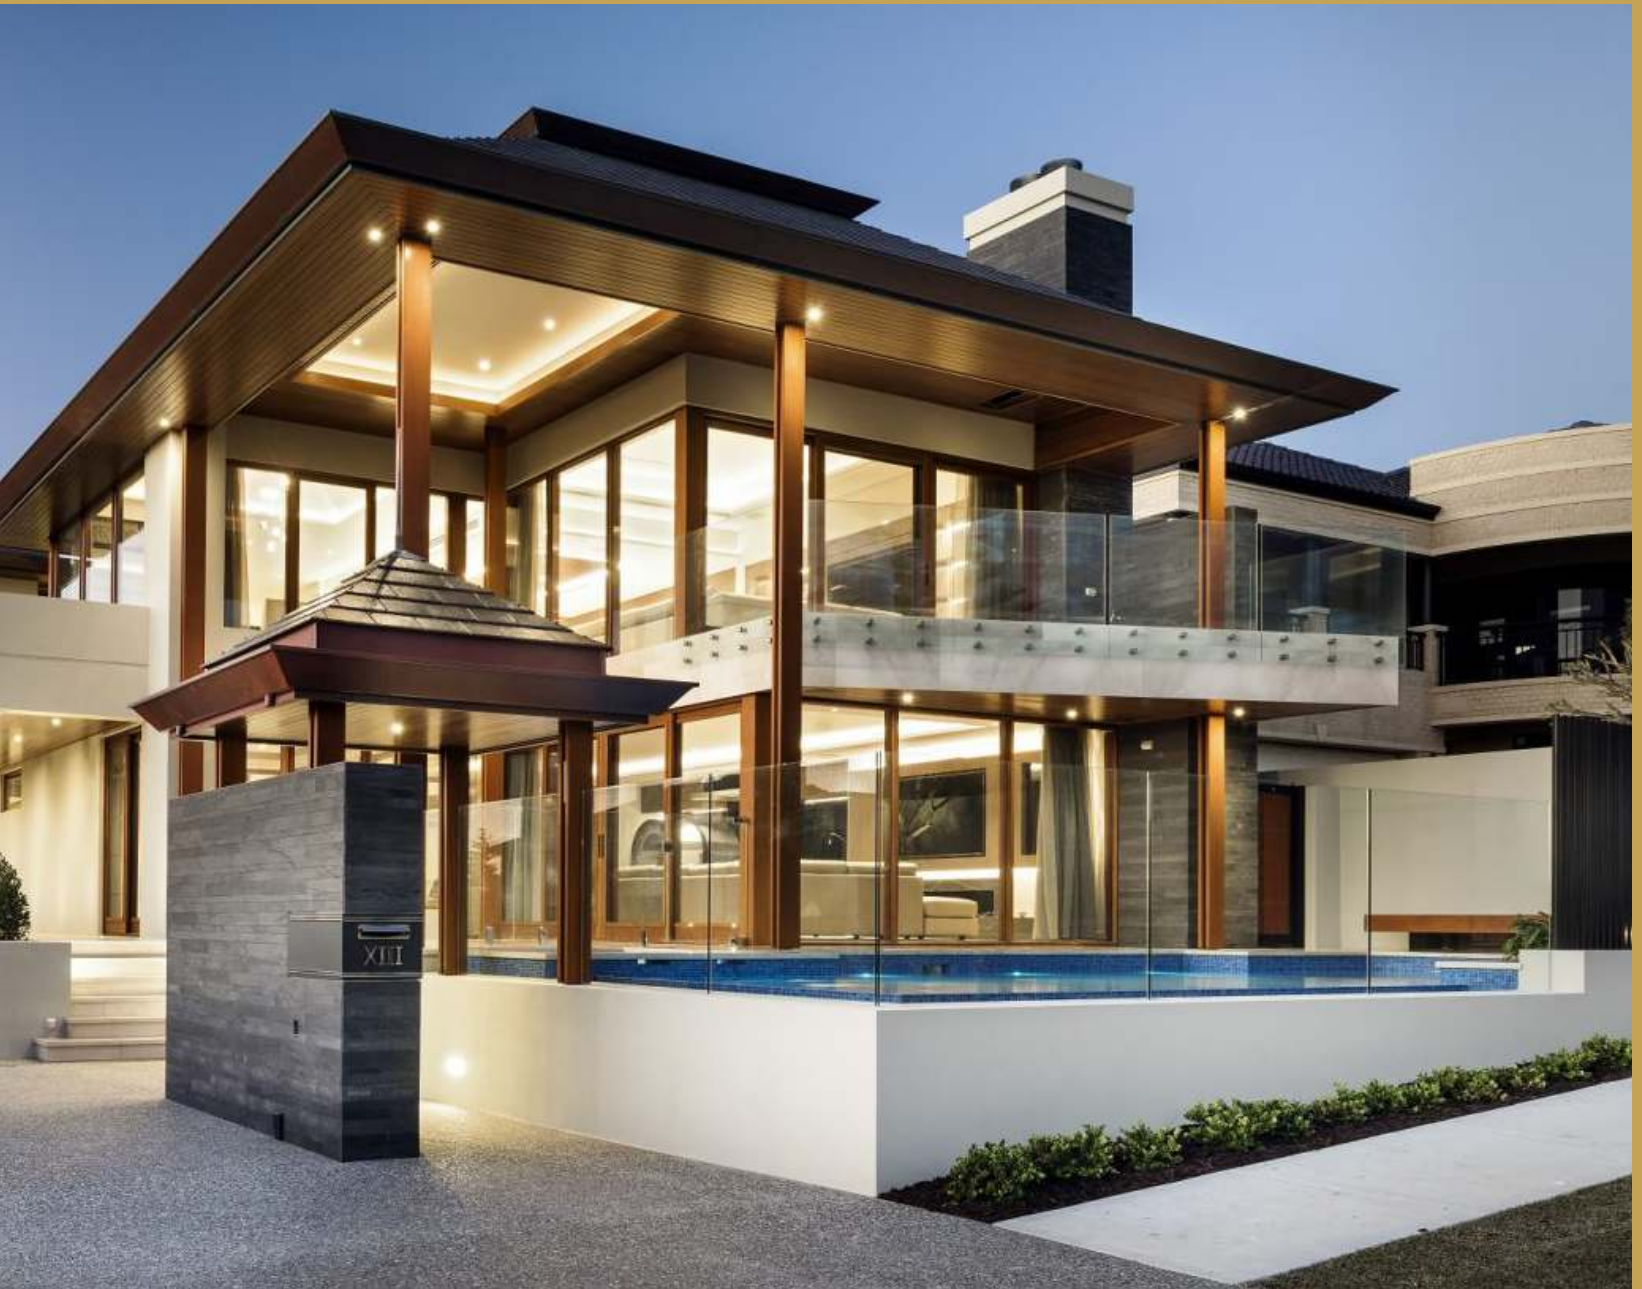



# MARVELL

## WEATHER PROOF EXTERIOR EMULSION LUXURY PREMIUM EMULSION

Morpho Paints Marvell is Weather proof premium exterior emulsion. It is long lasting exterior paint specially manufactured to withstand extreme conditions of high rainfall, heat and humidity and with gloss. It has special anti-algal and anti-fungal properties that provide excellent protection against algae growth. This product also imparts a luxurious lustre to your home.

METHODS OF APPLICATIONS	: Brush, Roller or Spray
DILUTION	: Water
DRYING TIME	: Surface dry 60 minutes/Hard dry - 24 hrs
RECOAT TIME	: At an interval of 4 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 160 - 200 square feet per liter single coat
SHADE	: White and Bases
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr 18ltr, 9ltr, 3.6ltr, 900ml

## FEATURES

- Provides High Washability.
- Fast Drying with excellent flow and levelling.
- Rich Glossy sheen.
- Excellent Protection against UV attack.
- Superior adhesion and excellent resistance to chalking.



# EXTERIOR

[www.morphopaints.com](http://www.morphopaints.com)  
MORPHO COATINGS PVT LTD

## LUXURY & PREMIUM EMULSION

*COLOURS*  
OF EXCELLENCE





# DUAL GUARD

## PREMIUM EXTERIOR & INTERIOR EMULSION

Dual Guard is a special formulation that can withstand severe weather and offers excellent defiance to cracking, flaking and deterioration in comparison to other Emulsion Paints. It is a heavy duty emulsion paint that exhibits sublime performance in dry to moderately humid climatic conditions with anti-algal & anti-fungal properties. Morpho Paints Dual Guard Economy Exterior Emulsion is water based acrylic wall finish for your dream home.

METHODS OF APPLICATIONS	: Brush, Roller or Spray
DILUTION	: Water
DRYING TIME	: Surface dry 45-60 minutes/Hard dry - 24 hrs
RECOAT TIME	: At an interval of 4 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 150-180 square feet per liter single coat
SHADE	: White and Bases
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr 18ltr, 9ltr, 3.6ltr, 900ml

## FEATURES

- Smooth finish with soft sheen.
- Allows applicability with brush, roller & spray.
- Provides fungus resistant coating.
- Excellent resistance to chalking and weathering.
- Saves money in long run.





# INTERIOR & EXTERIOR

[www.morphopaints.com](http://www.morphopaints.com)

MORPHO COATINGS PVT LTD

## PREMIUM EMULSION

*COLOURS*  
OF EXCELLENCE



# SAFESHIELD

## ECONOMY EXTERIOR EMULSION

Safeshield is a special formulation that can withstand severe weather and offers excellent defiance to cracking, flaking and deterioration in comparison to other Emulsion Paints. It is a heavy duty emulsion paint that exhibits sublime performance in dry to moderately humid climatic conditions with anti-algal & anti-fungal properties. Morpho Paints Safeshield Economy Exterior Emulsion is water based acrylic wall finish for your dream home.

METHODS OF APPLICATIONS	: Brush, Roller or Spray
DILUTION	: Water
DRYING TIME	: Surface dry 45-60 minutes/Hard dry - 24 hrs
RECOAT TIME	: At an interval of 4 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 130-160 square feet per liter single coat
SHADE	: White and Bases
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr 18ltr, 9ltr, 3.6ltr, 900ml

## FEATURES

- Smooth finish with soft sheen.
- Allows applicability with brush, roller & spray.
- Provides fungus resistant coating.
- Excellent resistance to chalking and weathering.
- Saves money in long run.









# GUARDOR SPLASH

AFFORDABLE ACRYLIC EXTERIOR EMULSION

Guardor Splash is Water based Acrylic Exterior Emulsion suitable for dry to moderately humid climate. It offers excellent resistance to chalking, cracking and weathering. Guardor SPLASH provides superior film integrity and Best in class coverage with smooth matt finish.

METHODS OF APPLICATIONS	: Brush, Roller or Spray
DILUTION	: Water
DRYING TIME	: Surface Dry 45-60 minutes/ Hard Dry 24 Hrs
RECOAT TIME	: At an interval of 4 Hrs
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 100-130 sqft per litre single coat
SHADE	: White and Bases
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr 18ltr, 9ltr, 3.6ltr, 900ml

## FEATURES

- Excellent resistance to chalking, peeling and cracking as compared to Distempers
- Durable hard film formation.
- Super affordable acrylic finish.
- Lends classy matt look to your walls
- Roller and Brush applicability.



# EXTERIOR

[www.morphopaints.com](http://www.morphopaints.com)  
MORPHO COATINGS PVT LTD

## ECONOMY EMULSION

*COLOURS*  
OF EXCELLENCE



# AURAL

## ULTRA LUXURY INTERIOR EMULSION

Morpho Paint's Ultra Luxury Interior Emulsion AURAL is a high gloss, stain resistant wall paint with washable feature that enable walls to look new for a long time. The paint's velvety finish and rich gloss would make you stare your home walls all day. It is only emulsion paint in India that not only has speciality additives for higher adhesion strength but also has added fragrance for smooth living experience, inside your dream home.

METHODS OF APPLICATIONS	: Brush, Roller or Spray
DILUTION	: Water
DRYING TIME	: Surface dry 75-90 minutes/Hard dry -36-48 hrs
RECOAT TIME	: At an interval of 4-6 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 280 - 320 square feet per liter single coat
SHADE	: White and Bases
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr 18ltr, 9ltr, 3.6ltr, 900ml

## FEATURES

- Soothing floral fragrance.
- Easy to apply with brush, roller or spray.
- Resistant to fading, cracking, peeling, blistering, etc.
- Excellent flow and leveling.
- Latex enabled layer formulation.
- Superior adhesion and excellent resistance to chalking.
- Provide a fungus Resistant Coating.
- Low Odour & Low VOC.
- Moisture resistant.





# INTERIOR

MORPHO COATINGS PVT LTD

[www.morphopaints.com](http://www.morphopaints.com)

## ULTRA LUXURY EMULSION

*COLOURS*  
OF EXCELLENCE



# VELVER

## LUXURY INTERIOR EMULSION

Morpho's Velver meets with all special qualities altogether like Stain Resistance, Silky Smooth Finish, Rich Glow, Eco-Friendly and anti-damping.

METHODS OF APPLICATIONS	: Brush, Roller or Spray
DILUTION	: Water
DRYING TIME	: Surface dry 60-75 minutes/Hard dry - 36 hrs
RECOAT TIME	: At an interval of 4-6 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 260-300 square feet per liter single coat
SHADE	: White and Bases
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr 18ltr, 9ltr, 3.6ltr, 900ml

## FEATURES

- Silky velvety Finish.
- Rich Sheen and High Gloss.
- Anti-stain and scrub Resistance.
- Long lasting gloss appearance.
- Low Odour and Low VOC.





# INTERIOR

[www.morphopaints.com](http://www.morphopaints.com)  
MORPHO COATINGS PVT LTD

## LUXURY EMULSION

*COLOURS*  
OF EXCELLENCE



# OPEARL

## PREMIUM INTERIOR EMULSION

Opearl is 100% acrylic specially formulated Premium Interior Emulsion which is bound to give your home a grand look. It is easily washable, offers excellent stain resistance and dirt pick-up.

METHODS OF APPLICATIONS	: Brush, Roller or Spray
DILUTION	: Water
DRYING TIME	: Surface dry 60 minutes/Hard dry - 24 hrs
RECOAT TIME	: At an interval of 4 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 250 - 300 square feet per liter single coat
SHADE	: White and Bases
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr 18ltr, 9ltr, 3.6ltr, 900ml

## FEATURES

- Superior adhesion and excellent resistance to chalking.
- Provides a washable coating.
- Premium Interior finish for your walls.
- Low Odour and Low VOC.
- Soft sheen and smooth-touch feeling.
- Dust-guard formulation.





# INTERIOR

MORPHO COATINGS PVT LTD

[www.morphopaints.com](http://www.morphopaints.com)

## PREMIUM EMULSION

*COLOURS*  
OF EXCELLENCE



# TANTCH

## ECONOMY INTERIOR EMULSION

Morpho Paints Tantch Interior Emulsion is an economic, value for money, durable and long lasting Interior Emulsion Paint with semi-gloss finish and Soft Sheen.

METHODS OF APPLICATIONS	: Brush, Roller or Spray
DILUTION	: Water
DRYING TIME	: Surface dry 45 minutes/Hard dry- 16 hrs
RECOAT TIME	: At an interval of 4 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 130-150 square feet per liter single coat
SHADE	: White and Bases
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr 18ltr, 9ltr, 3.6ltr, 900ml

## FEATURES

- Economical pocket-friendly Emulsion.
- Low value- high performance formulation.
- Long lasting and durable Interior finish.
- Excellent flow and levelling.
- Low Odour and Low VOC.
- Easy to apply with Brush, roller and spray.





# INTERIOR

MORPHO COATINGS PVT LTD

[www.morphopaints.com](http://www.morphopaints.com)

## ECONOMY EMULSION

*COLOURS*  
OF EXCELLENCE



# TANTCH SPLASH

**AFFORDABLE ACRYLIC INTERIOR EMULSION**

Tantch Splash, an Interior paint that provides value to your money when compared to Distempers and Cement Paints. It gives a smooth finish to your walls with good washability and best in class wall coverage.

METHODS OF APPLICATIONS	: Brush, Roller or Spray
DILUTION	: Water
DRYING TIME	: Surface Dry 45-60 minutes/Hard Dry 12-24 Hrs
RECOAT TIME	: At an Interval of 24 Hrs
COATING SYSTEM	: 90-120 sqft per litre single coat
COVERAGE	: 2-3 coats as required
SHADE	: White and Bases
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr 18ltr, 9ltr, 3.6ltr, 900ml

## FEATURES

- Good film forming properties
- Gives a smooth finish to the walls
- Better washability as compared to Distempers
- Lends good coverage
- Applicable by Brush and Roller.





# INTERIOR

MORPHO COATINGS PVT LTD

[www.morphopaints.com](http://www.morphopaints.com)

## ECONOMY EMULSION

*COLOURS*  
OF EXCELLENCE





# DAMP CEASE

## DAMP PROOF HEAT REFLECTIVE ROOF COAT

Morpho's Damp Cease is a glass fiber reinforced elastomeric coating system which when applied forms waterproofing membrane. Damp Cease after curing renders a thick, seamless, durable membrane thus offering ultimate waterproofing.

METHODS OF APPLICATIONS	: Brush, Roller or Spray
DILUTION	: Water
DRYING TIME	: Surface dry 180-240 minutes/Hard dry - 36-48 hrs
RECOAT TIME	: At an interval of 4-6 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 9-10 sq.mt./litre/coat
SHADE	: White and Bases
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr

## FEATURES

- Waterproofing solution for Terraces and Vertical walls.
- Reflects heat and reduces temperature upto 10 degree Celsius.
- Elastomeric formation gives unmatched Crack bridging.
- Reinforced with fibres for superior abrasion resistance.



# INTERIOR

MORPHO COATINGS PVT LTD

[www.morphopaints.com](http://www.morphopaints.com)

## DAMP PROOF HEAT REFLECTIVE ROOF COAT

*COLOURS*  
OF EXCELLENCE



# LAYOR

## WATERBORNE PRIMER EXTERIOR BASECOAT

Morpho Paints Layor Premium Exterior Wall Primer is a water-based wall coating suitable for application on exteriors as an undercoat to exterior emulsions. Its tough film helps to provide longer life of total paint system.

METHODS OF APPLICATIONS	: Brush, Roller or Spray
DILUTION	: Water
DRYING TIME	: Surface dry 60 minutes/Hard dry - 24 hrs
RECOAT TIME	: At an interval of 3 hours
COATING SYSTEM	: 2 Coats only
COVERAGE	: 120-160 square feet per liter single coat
SHADE	: White
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr

## FEATURES

- Delivers superior whiteness and Exceptional Coverage.
- Enhance top-coat finish.
- Excellent Adhesion to top coat emulsions.
- Fight against fading and mildew.
- Prevents peeling off of top coat Emulsions.







# DEEPRIME

WATERBORNE PRIMER INTERIOR & EXTERIOR

Morpho Deeprime Interior/Exterior Wall Primer is a perfect and easy to use primer for water-based wall finishes like distempers and plastic emulsions. It can be thinned to application viscosity by adding an appropriate amount of water. It is specially fortified with fungicides. It does not chalk and can easily be applied on cured fresh plaster.

METHODS OF APPLICATIONS	: Brush, Roller or Spray
DILUTION	: Water
DRYING TIME	: Surface dry 85 minutes/Hard dry - 24 hrs
RECOAT TIME	: At an interval of 3 hours
COATING SYSTEM	: 2 Coats only
COVERAGE	: 110-150 square feet per liter single coat
SHADE	: White
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr

## FEATURES

- Suitable for both Interior and exterior use.
- Superior opacity and whiteness.
- Excellent adhesion.
- Help improve the appearance of topcoat.
- Anti-chalking and Anti-peeling formulation.





# INTERIOR & EXTERIOR

www.morphopaints.com  
MORPHO COATINGS PVT LTD

## PRIMER

*COLOURS*  
OF EXCELLENCE





# WALLASA

## ACRYLIC WASHABLE DISTEMPER

Morpho paints Wallasa is a water-based interior wall paint. It is a value for money product that makes it possible for Consumers to have beautiful walls at affordable prices.

METHODS OF APPLICATIONS	: Brush, Roller
DILUTION	: Water
DRYING TIME	: Surface dry 45 minutes/Hard dry - 24 hrs
RECOAT TIME	: 4 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 110-130 square feet per kg single coat
SHADE	: White and Bases
PACKAGING	: 20Kg, 10Kg, 5Kg, 2Kg

## FEATURES

- Best in-class Coverage and hiding.
- Allows to clean wall stains easily.
- Provides beautiful smooth finish.
- Affordable yet long lasting paint.
- Smooth matt-finish for grand look.



# INTERIOR

www.morphopaints.com  
MORPHO COATINGS PVT LTD

COLOURS  
OF EXCELLENCE

## ACRYLIC WASHABLE DISTEMPER



# WALLASA

## REGULAR ACRYLIC DISTEMPER

Morpho paints Wallasa Regular Acrylic is a water-based interior wall paint. It is a value for money product that makes it possible for Consumers to have beautiful walls at affordable prices.

METHODS OF APPLICATIONS	: Brush, Roller
DILUTION	: Water
DRYING TIME	: Surface dry 45 minutes/Hard dry - 24 hrs
RECOAT TIME	: 4 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 100-120 square feet per kg single coat
SHADE color	: White and also available in attractive readymade color
PACKAGING	: 20Kg, 10Kg, 5Kg, 2Kg & 1Kg Pouch

## FEATURES

- Best in-class Coverage and hiding.
- Allows to clean wall stains easily.
- Provides beautiful smooth finish.
- Affordable yet long lasting paint.
- Smooth matt-finish for grand look.





## REGULAR ACRYLIC DISTEMPER



# FASTINT

## UNIVERSAL STAINER

Morpho Paints universal stainers are Fast Pigment, high strength, concentrated color blends which can be used to create a wide range of shades. The colors are durable and weather-fast with very high tinting strength.

DIRECTIONS FOR USE	: Add small quantity of stainer at a time to get the desired shade. The stainers should be added before thinning the base/white paint. Stir vigorously to mix the stainer completely in the paint. It is advisable not to use more than 5% of Universal stainer to a given volume of paint.
DILUTION	: With Water / Solvent Base Paint
SHADE	: Black, Yellow, Yellow Green, Blue, Violet, Turkey Umber, Red, Orange, Yellow Oxide, Green, Red Oxide, Brunt Sienna & Magenta
PACKAGING	: 200ml, 100ml, 50ml

## FEATURES

- Non-fading pigments.
- Water-soluble formulation
- Superior-tinting strength
- Non-toxic.
- Concentrated color blends.



The Actual product may vary from the product shown in this book.





# PREMIUM ENAMEL

Premium Interior/Exterior Hi-Gloss Enamel is 100% alkyd formulation. It provides a plastic finish and is great for mild steel & wooden surfaces. Its tough, scratch resistant film withstands moisture and wear, provides ultimate durability, exceptional hide and a brilliant, glossy appearance.

METHODS OF APPLICATIONS	: Brush, Spray
DILUTION	: MTO & Turpentine Oil
DRYING TIME	: Surface dry 4-6 hrs/Hard dry - 24-48 hrs
RECOAT TIME	: At an interval of 6-8 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 185-225 square feet per liter single coat
SHADE	: White and Colors
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr, 500 ml, 200 ml, 100 ml, 50 ml

## FEATURES

- Rich High Gloss appearance.
- Premium smooth finish.
- Good stain resistance.
- Excellent Durability and Hardness.
- Superior Brushability.





# CLEAR VARNISH

## SYNTHETIC CLEAR VARNISH

Morpho Paints Varnish is primarily used to seal wood finishes where, the distinctive tones and grains in the wood are intended to be visible. The transparent formula allows for the wood grain to show through. The finish provides superb protection against normal wear, abrasions and stains.

METHODS OF APPLICATIONS	: Brush, Spray
DILUTION	: MTO & Turpentine Oil
DRYING TIME	: Surface dry 4-6 hrs/Hard dry - 24-48 hrs
RECOAT TIME	: At an interval of 6-8 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 185-225 square feet per liter single coat
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr, 500ml, 200ml

## FEATURES

- Enhanced Glossy finish.
- Easy applicability with brush & spray.
- Excellent Coverage with hard-film finish.
- Durable and long lasting formulation.
- Rapid Drying-time.







# WHITE PRIMER

## WHITE PRIMER OIL BASE (S/T)

Morpho Paints Oil-Base White Original Primer, Sealer and Stain Blocker is suitable for application on most interior surfaces such as furniture, drywall, plaster, woodwork, paneling, wallpaper, masonry, brick, painted metal and properly prepared glossy surfaces. It blocks smoke and water stains and it seals pet odors.

METHODS OF APPLICATIONS	: Brush, Roller
DILUTION	: MTO & Turpentine Oil
DRYING TIME	: Surface dry 4-6 hrs/Hard dry - 24-48 hrs
RECOAT TIME	: At an interval of 4-6 hours
COATING SYSTEM	: 2-3 Coats as required
COVERAGE	: 130-160 square feet per liter per coat
SHADE	: White
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr, 500ml

## FEATURES

- Quick Drying with Smooth finish.
- Corrosion resistance.
- Dries hard to form a Good coating.
- Easily applied by brush and spray.







# METAL PRIMER

## RED OXIDE METAL PRIMER (ROMP)

Morpho Paints Metal Primer finish can also be applied to wood for long-lasting color. Apply for superior coverage and hiding. Adds an additional layer of corrosion protection against the elements.

METHODS OF APPLICATIONS	: Brush, Spray
DILUTION	: MTO & Turpentine Oil
DRYING TIME	: Surface dry 4-6 hrs/Hard dry - 24-48 hrs
RECOAT TIME	: At an interval of 4 hours
COATING SYSTEM	: 2 Coats only
COVERAGE	: 150-170 square feet per liter single coat
SHADE	: Red Tone
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr, 500 ml, 200 ml

## FEATURES

- Good Corrosion Resistance.
- Provide tough film.
- Free from heavy particles and metals.
- Easy Brushability.
- Matt finish with Smooth free-flowing Consistency.



# SYNTHETIC

www.morphopaints.com

MORPHO COATINGS PVT LTD

## OIL PRIMER

*COLOURS*  
OF EXCELLENCE





# WALL PUTTY

## PREMIUM QUALITY

### PREMIUM WALL PUTTY INTERIOR & EXTERIOR

Exterior exposure of the walls, leads to a number of damages & deformations due to the constant change in weather conditions. Considering these facts, Morpho Paints has developed White Cement Based Wall Putty to lend optimum protection and durability to exterior surfaces, besides that it provides an excellent finish.

METHODS OF APPLICATIONS	: Funnor
DILUTION	: Water
DRYING TIME	: Surface dry 8-12 hrs
RECOAT TIME	: At an interval of 8-12 hours
COATING SYSTEM	: 2 Coats only
COVERAGE	: 20-30 square feet per kg upto 1.5 mm thickness in two coats
SHADE	: White
PACKAGING	: 40Kg, 20 Kg, 5 Kg

## FEATURES

- Elongates life of paint.
- Ease to apply.
- Fills wall imperfections precisely.
- Good water resistance.
- Provide smooth and uniform finish to rough plasters.
- Good intercoat adhesion to emulsion paints.





# EXTERIOR & INTERIOR

www.morphopaints.com  
MORPHO COATINGS PVT LTD

## WALL PUTTY

*COLOURS*  
OF EXCELLENCE



# THINNER

## PREMIUM QUALITY FINISH

Morpho Paints thinner is a rich, solvent based reducing agent that provides required viscosity to paint, maintaining a smooth flow of fluid and protecting the paint from decaying.

METHODS OF APPLICATIONS	: Brush, Spray
DRYING TIME	: Immediate
SHADE	: Transparent
PACKAGING	: 20ltr, 10ltr, 4ltr, 1ltr, 500 ml, 200 ml



The Actual product may vary from the appearance shown in this book.

# SANDING SEALER

Sanding sealer is a liquid base finish that is applied to bare natural wood or to any uncoated wood product. Morpho's Sanding sealer helps improve the condition of subsequent coats of paint or clear finish by sealing the wood pores. With the wood pores sealed, the coating is able to spread out and cover the surface rather than being quickly soaked up. It helps wood achieve a smooth, even, and color-consistent top finish.

METHOD OF APPLICATION	:	BRUSH, POLISH CLOTH
DILUTION	:	THINNER
DRYING TIME	:	Surface dry 30-60 minutes
RECOAT TIME	:	At an interval of 6-12 hours
COATING SYSTEM	:	2-3 Coates as Required
SHADE	:	White
PACKAGING	:	20ltr., 4ltr., 1ltr., 500ml & 200 ml



# T.T. CLEAR

Morpho Paint's T.T Clear is a NC based quick drying clear lacquer. It is suitable for interior wooden furniture. Clear lacquer wood coat is used to get gloss finish. Application of T.T Clear gives desirable results when applied.

METHOD OF APPLICATION	:	SPRAY, POLISH CLOTH
DILUTION	:	THINNER
DRYING TIME	:	Surface dry 30-60 minutes
RECOAT TIME	:	At an interval of 6-12 hours
COATING SYSTEM	:	2-3 Coates as Required
SHADE	:	TRANSPARENT
PACKAGING	:	20ltr., 4ltr., 1ltr., 500ml & 200 ml



The Actual product may vary from the appearance shown in this book.



# N.C. PAINTS

Morpho's NC based Paints are used extensively in wood finish applications, particularly where a high quality finish is required. They dry rapidly, demonstrate excellent polishing properties and enhance the appearance of the grain in many varieties of wood. Readily available shades of NC paints are White, Maroon.

METHOD OF APPLICATION	:	SPRAY, BRUSH
DILUTION	:	THINNER
DRYING TIME	:	Surface dry 30-60 minutes
RECOAT TIME	:	At an interval of 6-12 hours
COATING SYSTEM	:	2-3 Coates as Required
SHADE	:	As Per Requirement
PACKAGING	:	20ltr., 4ltr., 1ltr., 500ml & 200 ml



# MELAMINE

Melamine polish is a closed pore polish i.e. it makes the wood non-breathable and protects mainly from deterioration. Our Premium Melamine Range wood finish for Interiors offers a hard, high solids film built with excellent Gloss and clarity. It has been formulated with Non-yellowing and mar resistance properties as well as greater resistance to water. . Melamine polish dries off within 20 mins. after its application that offers more of glossy appearance then matt finish on coated wood panel or surface.

METHOD OF APPLICATION	:	SPRAY,
DILUTION	:	THINNER
DRYING TIME	:	Surface dry 30-60 minutes
RECOAT TIME	:	At an interval of 6-12 hours
COATING SYSTEM	:	2-3 Coates as Required
SHADE	:	TRANSPARENT
PACKAGING	:	20ltr., 4ltr., 1ltr.



The Actual product may vary from the appearance shown in this book.

# AUTOMATIC PAINT DISPENSER / TINTING MACHINE

## Product Description

- High Level of accuracy and repeatability in dispensing
- Heavy Duty Robust Metal body
- Single Central Motor for agitation of each Canister
- No Pipes – No Dripping of Colorants
- Single Control Board

## Technical Specifications

- |                             |   |                                          |
|-----------------------------|---|------------------------------------------|
| • Machine Type              | : | 16 Circuit sequential dispensing machine |
| • Minimum Dispensing        | : | 0.07 millilitre                          |
| • Plastic Canister Capacity | : | 1.5 Litre each                           |
| • S.S. Pump Capacity        | : | 30 ml.                                   |
| • Stirring and Purging      | : | Software controlled stirring and purging |
| • Nozzle                    | : | Integrated Nozzle Closer                 |
| • Can Sensor                | : | Controlled dispensing through can sensor |
| • Can Shelf                 | : | Manually repositionable can tray         |
| • Compatibility             | : | Universal Colorant                       |
| • Power Supply              | : | 230v AC, Single Phase, 50/60 Hz          |
| • Software                  | : | Spectrum Database                        |
| • Can Size                  | : | Maximum Dia 320mm and Height 400mm       |
| • Machine Weight            | : | Net 125 Kgs and Gross 155 Kgs            |
| • Machine Dimension         | : | Height 1230mm, Width 600mm, Depth 760mm  |





## MORPHO COATINGS PVT LTD

### Registered Office :

29, Sector 142 Noida, Gautam Buddha Nagar, Uttar Pradesh - 201305  
admin@morphopaints.com, www.morphopaints.com



**Toll Free: 1800 103 0471**

